


Series load cells: FCK - FCOL

Up to 300 kg application range

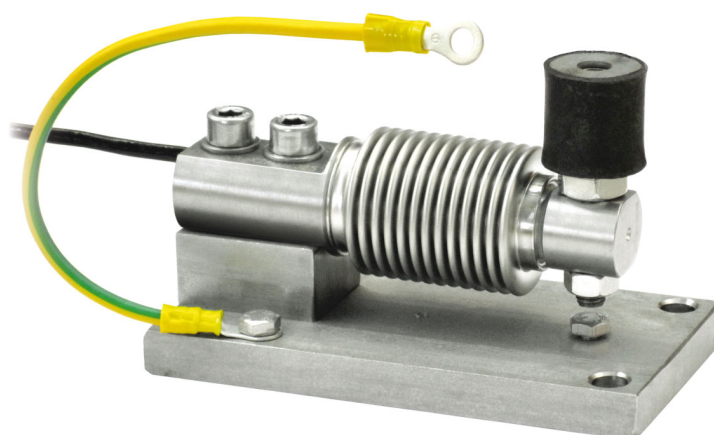

MAX STATIC LOAD kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
300	FCK - FCOL	1.2	TFCFSB


Load cell not included.

DESCRIPTION


- Compression joint in AISI 304 stainless steel and rubber.
- Lower plate and block in AISI 304 stainless steel.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- Locking screw to avoid damage during transport and installation.

DIMENSIONS AND TECHNICAL SPECIFICATIONS


- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Connect the structure to be weighed by means of copper wire, then connect all the lower plates to the earthing system.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts otherwise adjust the height.

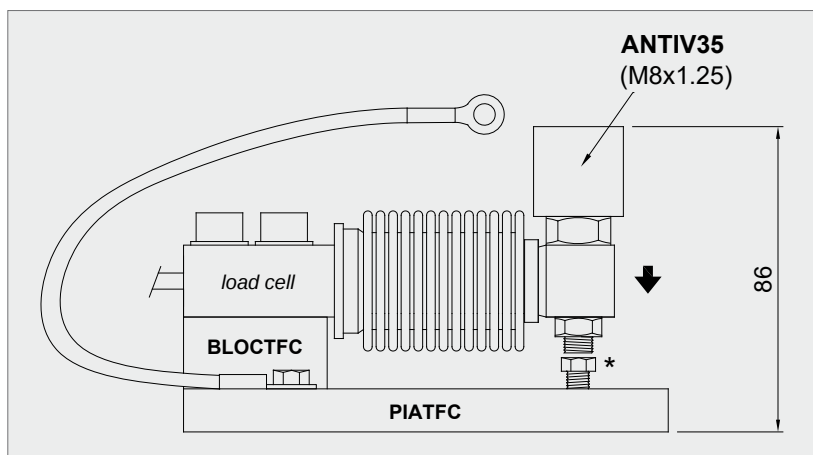


PIATFC

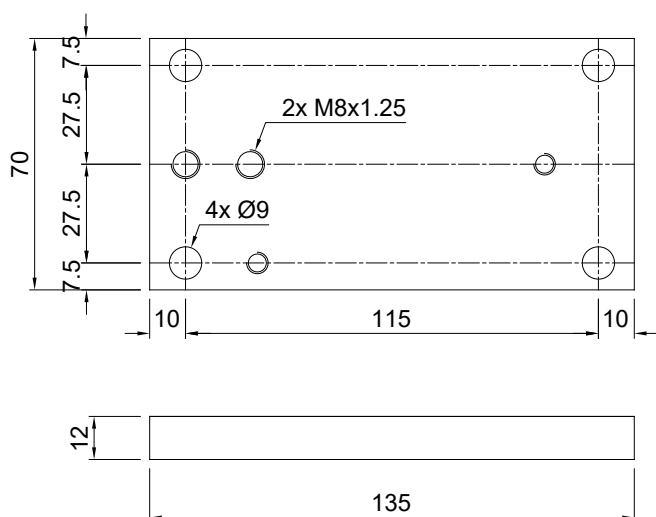

BLOCTFC

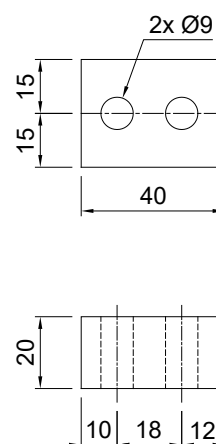

ANTIV35

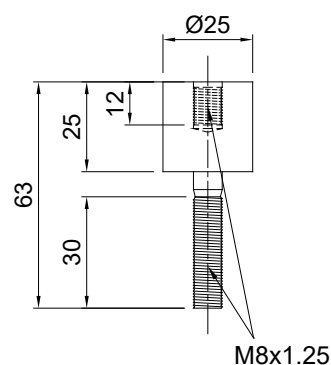

FIXING TO THE WEIGHED STRUCTURE

