


Series load cells: FCK - FCOL

Up to 300 kg application range

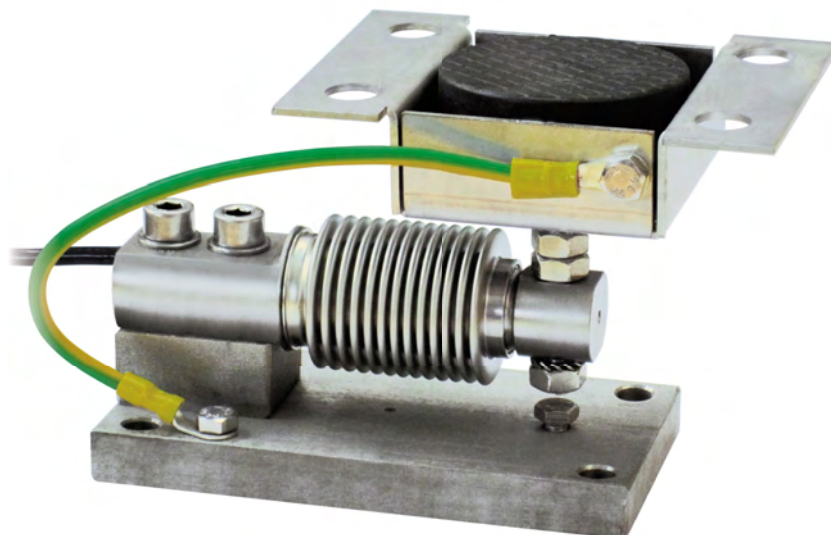

MAX STATIC LOAD kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
200	FCK - FCOL	1.7	TFCPV
200	FCK - FCOL	1.7	TFCPVZ
300	FCOL (350 - 500 kg)	1.7	TFCPV10
300	FCOL (350 - 500 kg)	1.7	TFCPVZ10


Load cell not included

DESCRIPTION


- Adjustable upper plate in AISI 304 stainless steel (PPV) or galvanized steel (PPVZ).
- Lower plate and block in AISI 304 stainless steel.
- Constraint against lateral forces and anti-tilt by AISI 304 stainless steel (TFCPV, TFCPVZ, TFCPV10) or galvanized steel (TFCPVZ10) self-centring joint foot.
- Compensation for any misalignments of the support plates of the structure.
- Partial height adjustment.
- Locking screw to avoid damage during transport and installation.

DIMENSIONS AND TECHNICAL SPECIFICATIONS


- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the lower plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.

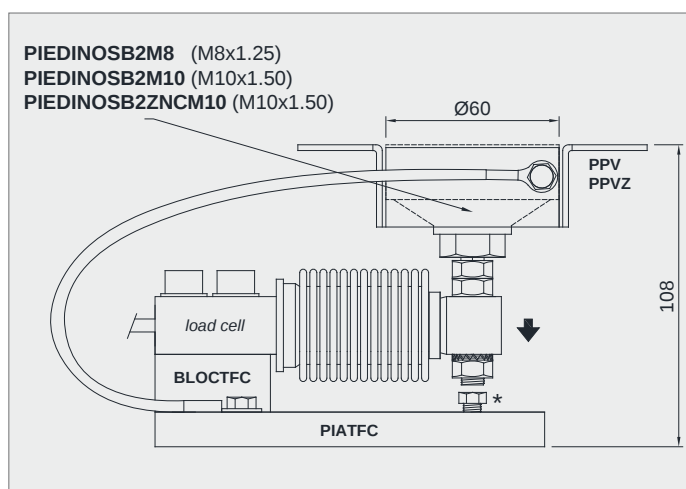


PIATFC

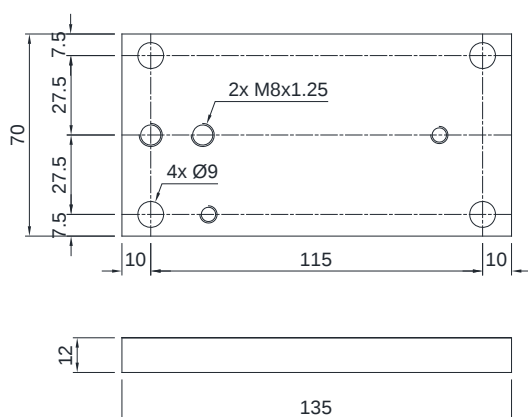


BLOCTFC



PPV
PPVZ

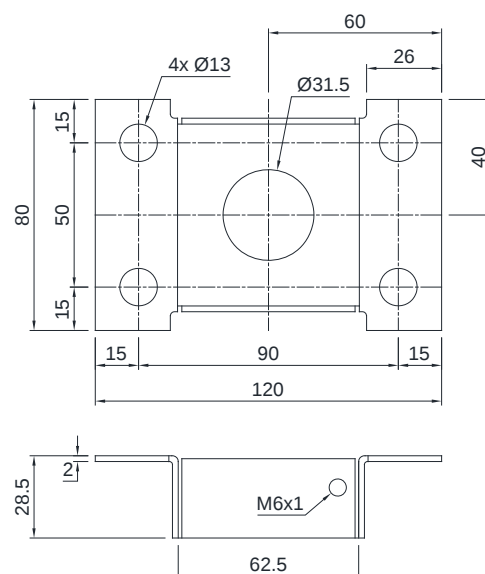

FIXING TO THE WEIGHED STRUCTURE

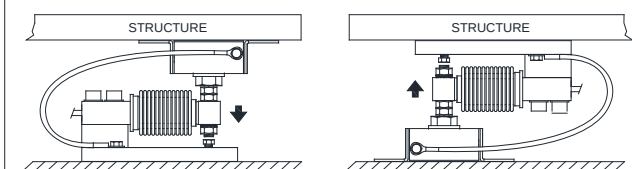

POSSIBLE UPPER PLATE POSITIONS

