


Series load cells: **AZLI - AZL - AZS - AM**

Up to 300 kg application range

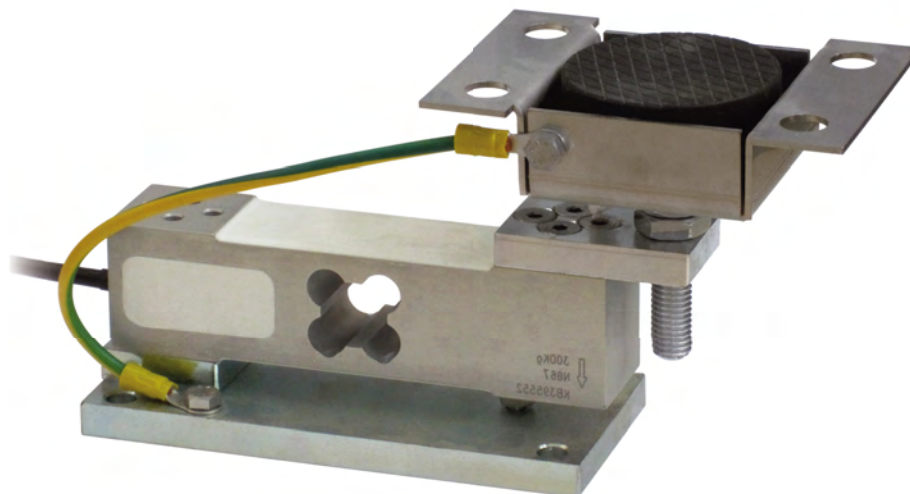

MAX STATIC LOAD kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
200	AZLI (max 50 kg) - AZL - AZS	1.7	T8AZL
300	AM	1.7	T8AM


Load cell not included

DESCRIPTION


- Adjustable upper plate in galvanized steel (PPVZ).
- Lower plate and block in galvanized steel.
- Constraint against lateral forces and anti-tilt by nickel-plated self-centring joint foot.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- Locking screw to avoid damage during transport and installation.
- It can be used for systems with at least 3 load cells connected in parallel.

DIMENSIONS AND TECHNICAL SPECIFICATIONS


- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the lower plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the support base of the foot, you must proceed to adjust foot height.

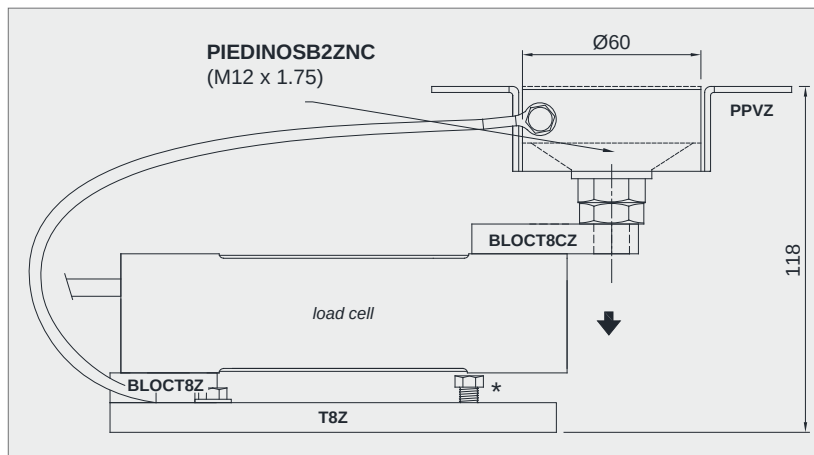


T8Z

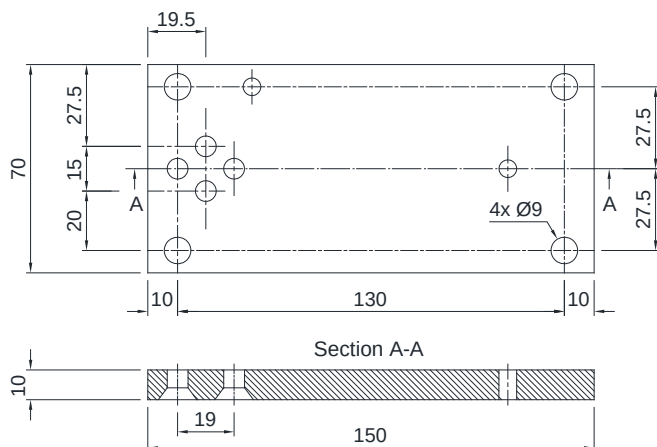


PPVZ

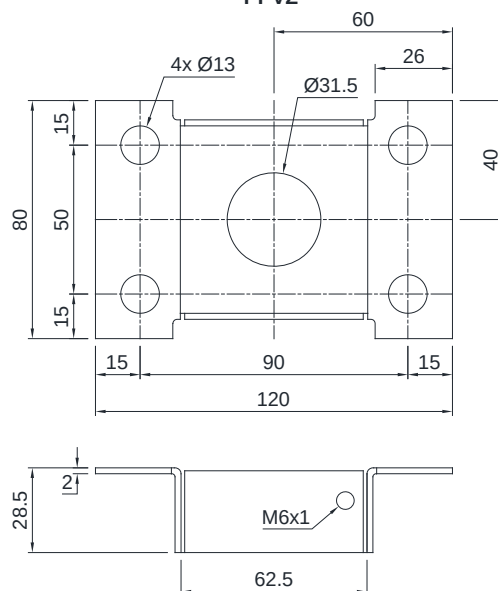


BLOCT8Z




BLOCT8CZ



PIEDINOSB2ZNC
M12 x 1.75 mm



FIXING TO THE WEIGHED STRUCTURE

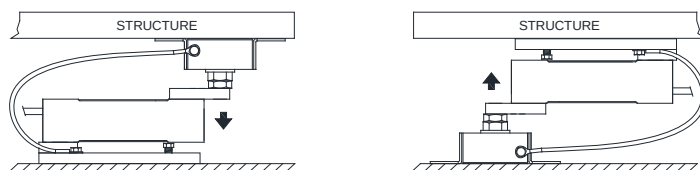

POSSIBLE UPPER PLATE POSITIONS

